


G-1 RIGHT ELEVATION

3/16"=1'-0"

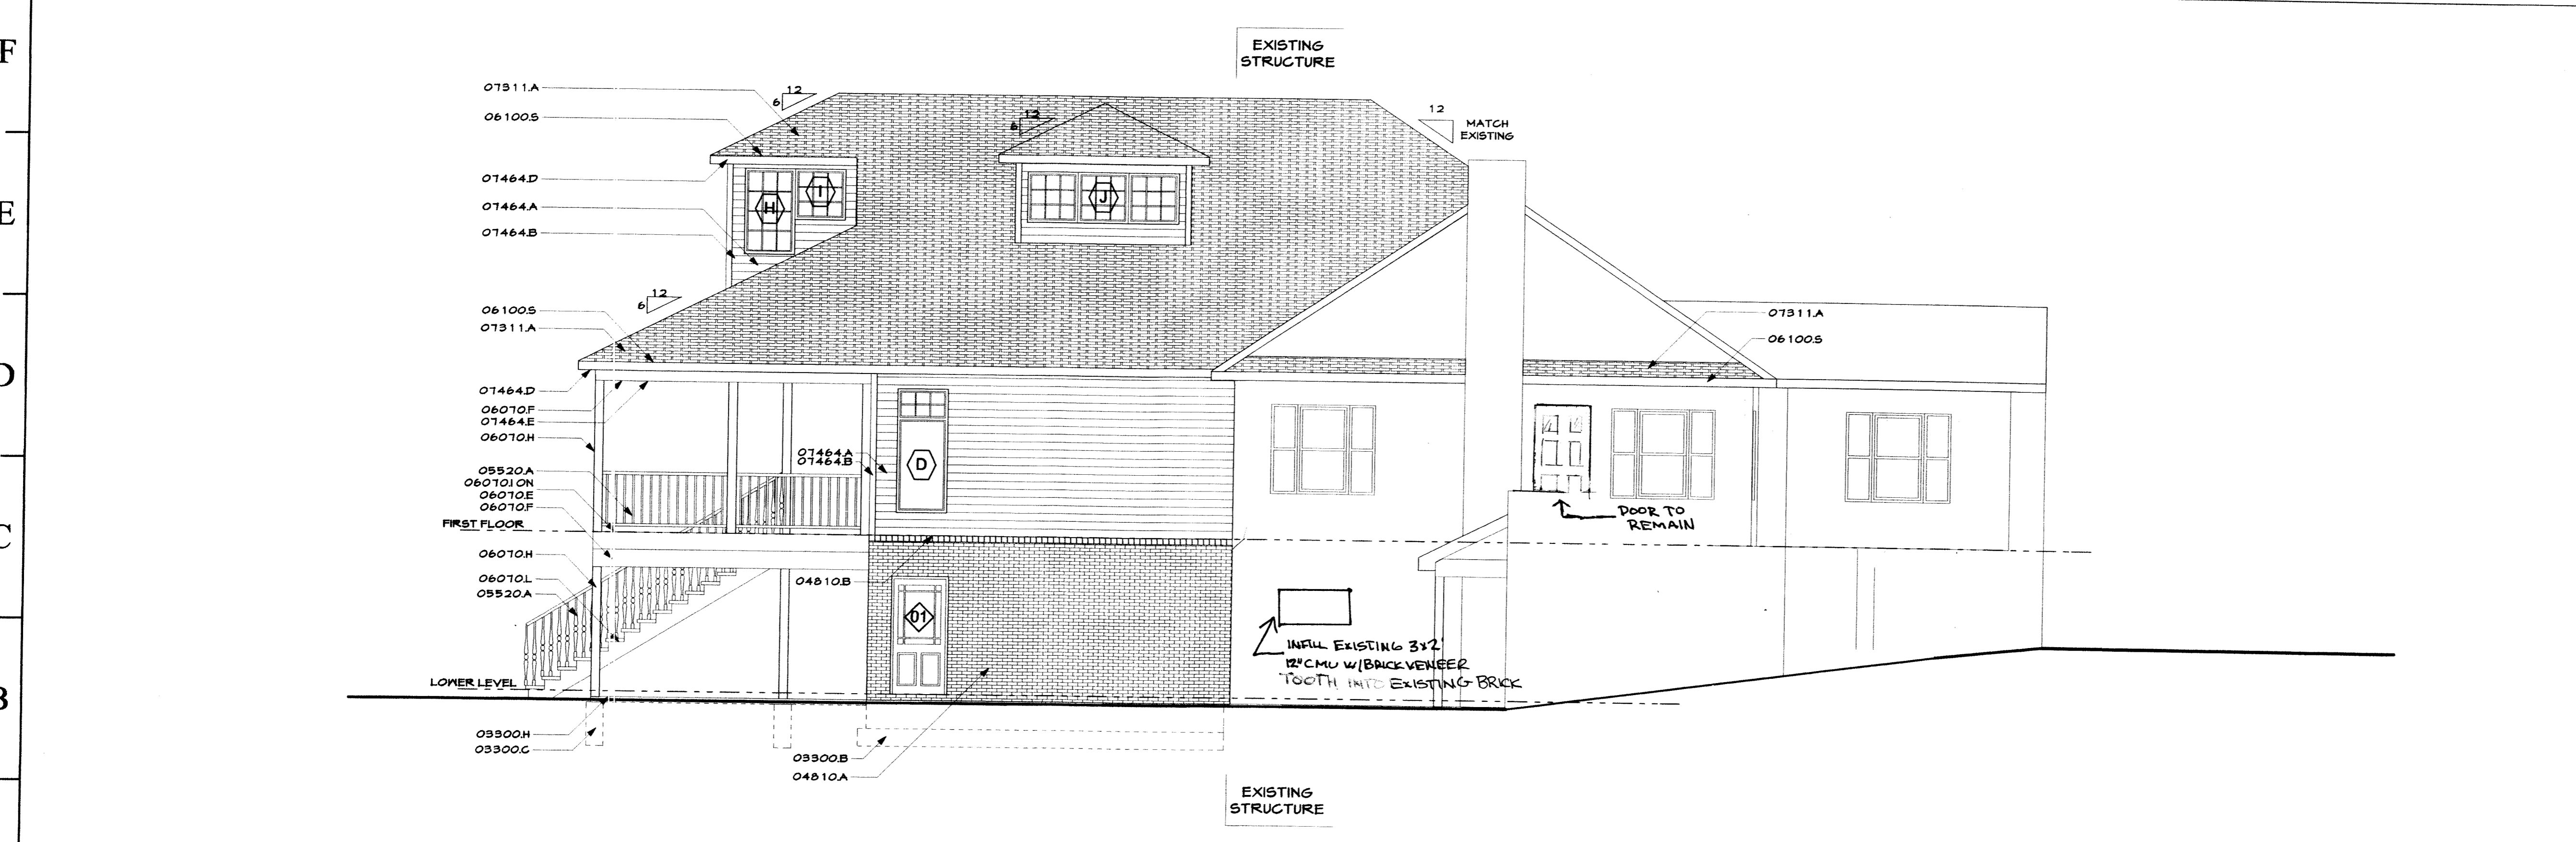

A-1 LEFT ELEVATION

3/16"=1'-0"

MATERIALS KEYNOTES

DIVISION 3	CONCRETE
03300.B	12" x 24" Continuous conc. flg. w/3-#4 st. rebar.
03300.C	12" x 12" x 24" conc. flg.
03300.H	4" conc. Slab w/ 6x6 10/10 w.w.m on 4 mil Vapor barrier on 4" gravel base
03300.J	Thickn. Slab to 8" deep and 16" wide
03300.L	12" Expansion joint.
03300.M	48" x 48" x 12" Conc Flg.
DIVISION 4	MASONRY
04085.A	Fabric flashing w/ weeps @ 3/2" o.c.
04220.C	8" CMU w/ horizontal st. reinf. every other course.
04220.D	12" CMU w/ horizontal st. reinf. e.o.c.
04810.A	4" Brick veneer.
04810.B	Brick rowlock cap.
04810.C	Brick soldier course.
04820.A	4" x 8" Reinf. conc. lintel.
DIVISION 5	METALS
05120.A	WS28 W/ Hung Plate
05120.B	WS X 18
05120.J	3" Steel column.
05120.K	3" x 4" x 3/8" Steel angle.
05520.B	16KA-Sil-Joist-@-24"-O.C.
05520.A	Powder Coated Aluminum Railing @ 42" A.F.F.
DIVISION 6	WOOD, PLASTICS AND COMPOSITES
06070.C	2x8 Pressure Treated
06070.D	2x12 Pressure Treated
06070.E	2X12 Pressure Treated Joists @ 16" O.C.
06070.F	(3) 2x12 Pressure Treated Beam
06070.G	4X4 Pressure Treated
06070.H	6X6 Pressure Treated
06070.I	54 X 6 Pressure Treated
06070.J	2x6 Pressure Treated Plate anchored at 48" o.c.
06070.K	P.T. Wood Railings @ 36" A.F.F.
06070.L	P.T. Prefabricated Stairs
06070.M	P.T. 1 x
06080.A	1/2" Dia. Anchor bolts.
06080.B	Galv. Steel joist hanger.
06100.A	2 x 4 Wood studs @ 16" o.c.
06100.B	2 x 6 wood studs @ 16" o.c. w/1/2" wood sheathing & house wrap.
06100.C	2 x 4
06100.D	2 x 6
06100.E	2 x 8
06100.F	2 x 10
06100.G	2 x 12
06100.H	(3) 2 x 10 Header.
06100.I	4 x 4
06100.J	6 x 6
06100.K	2 x 6 Clad rake board.
06100.L	2 x 8 Clad fascia board.
06100.M	2 x 8 ceiling joists @ 24" o.c.
06100.N	2 x 12 Rafter @ 24" o.c.
06100.O	2 x 12 Floor joists @ 16" o.c. w/ 3/4" plywd
06100.P	34" T&G Plywood subfloor
06100.Q	12" wood sheathing.
06100.R	5/8" wood sheathing
06173.A	24" Wood Trusses @ 24" O.C. w/ 5/8" wd sheathing
06173.B	Pre-engineered Roof trusses @ 24" o.c. w/ 5/8" wd sheathing
06173.C	Pre-engineered mono trusses @ 24" o.c. w/ 5/8" wd sheathing
06173.D	Pre-Engineered Hip Truss
06173.E	Rim Joist
06176.B	11 3/4" LPI wood joists @ 16" o.c. w/ 3/4" plywd
06180.B	(3) 1 3/4" 14" LVL.
06430.A	Prefabricated pine stairs.
06430.B	Wood railings @ 42" A.F.F.
DIVISION 7	THERMAL AND MOISTURE PROTECTION
07110.A	4 Mil. vapor barrier w/ gravel ballast.
07120.A	Bituminous sealant w/ 6 mil VB below grade
07180.A	Cementitious parging
07185.A	60 mil Dura-deck or Deking
07212.B	R-19 (8") fiberglass batt insulation.
07212.E	R-38 (12") fiberglass batt insulation.
07311.A	25 Year Fiberglass shingles on 15# Asphalt impregnated roofing paper
07464.A	Vinyl siding.
07464.B	Vinyl trim.
07464.D	Vented vinyl soffit.
07464.E	Beaded vinyl soffit.
07464.F	Stucco 3/8" Thick
07631.A	Pre-finished aluminum gutter.
07631.B	Pre-finished aluminum downspouts
07724.A	Continuous ridge vent.
DIVISION 9	FINISHES
09280.A	1/2" Gypsum Board.
09280.B	1/2" Gypsum waterproof "green board."
09511.A	Suspended ceiling system.

No.	Revisions/Submissions	Date
P.O. Box 421 Prince Frederick, Maryland 20678		
www.patuxentarchitects.com		
TEL 410-257-9298 FAX 410-535-4127		
SOLOMONS ISLAND YACHT CLUB SOLOMONS, MARYLAND		
Drawing Title		
ELEVATIONS		
ARCHITECT'S CERTIFICATION STATEMENT I CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED ARCHITECT UNDER THE LAWS OF THE STATE OF MARYLAND. LICENSE NUMBER: 9085 EXPIRATION DATE: JUNE 15, 2008.		
Seal	Designed PDK Drawn RWR Checked PDK Reviewed PDK Date 02-04-08	Project No. 02-0713 Scale AS SHOWN Drawing No. A202 11 of 17

480,